

Corporate Office: #301-302, Park Centra, Sector-30, National Highway 8, Gurugram, Haryana.

Ph. +91- 124-477 9200, **Toll Free:** 1800 200 7577 / 1800 103 7577

Follow us



f Hindware Italian Tiles



hindwareitaliantiles



Hindware Italian Tiles



(i) hindwareitaliantiles

www.hindwareitaliantiles.com



EXOCICA an Everlasting Finish

With Quartz, the most premium material built to last.



Introducing the enduring beauty and unmatched resilience of Quartz by Hindware Italian Collection. It is crafted with a blend of crushed quartz, resins, and pigments. Quartz offers the timeless look of natural stone with the exceptional strength and functionality of modern materials. Resistant to heat, scratches, and everyday wear & tear; it delivers a lasting performance.

Features

Strength

Quartz is an extremely hard and durable material.

Non-Porous

Quartz is much less porous than marble, concrete, or granite.

Built to last

It's highly difficult for moulds, viruses, and bacteria to develop in Quartz.

Resistance

Quartz is extremely resistant to heat, stains, and cracks.

Easy to Clean

The day-to-day spills and dust is very easy to clean. This helps in preserving the luxurious look of the Quartz for a long time.

Applications



kitchen Countertops





ift area




Reception Desks









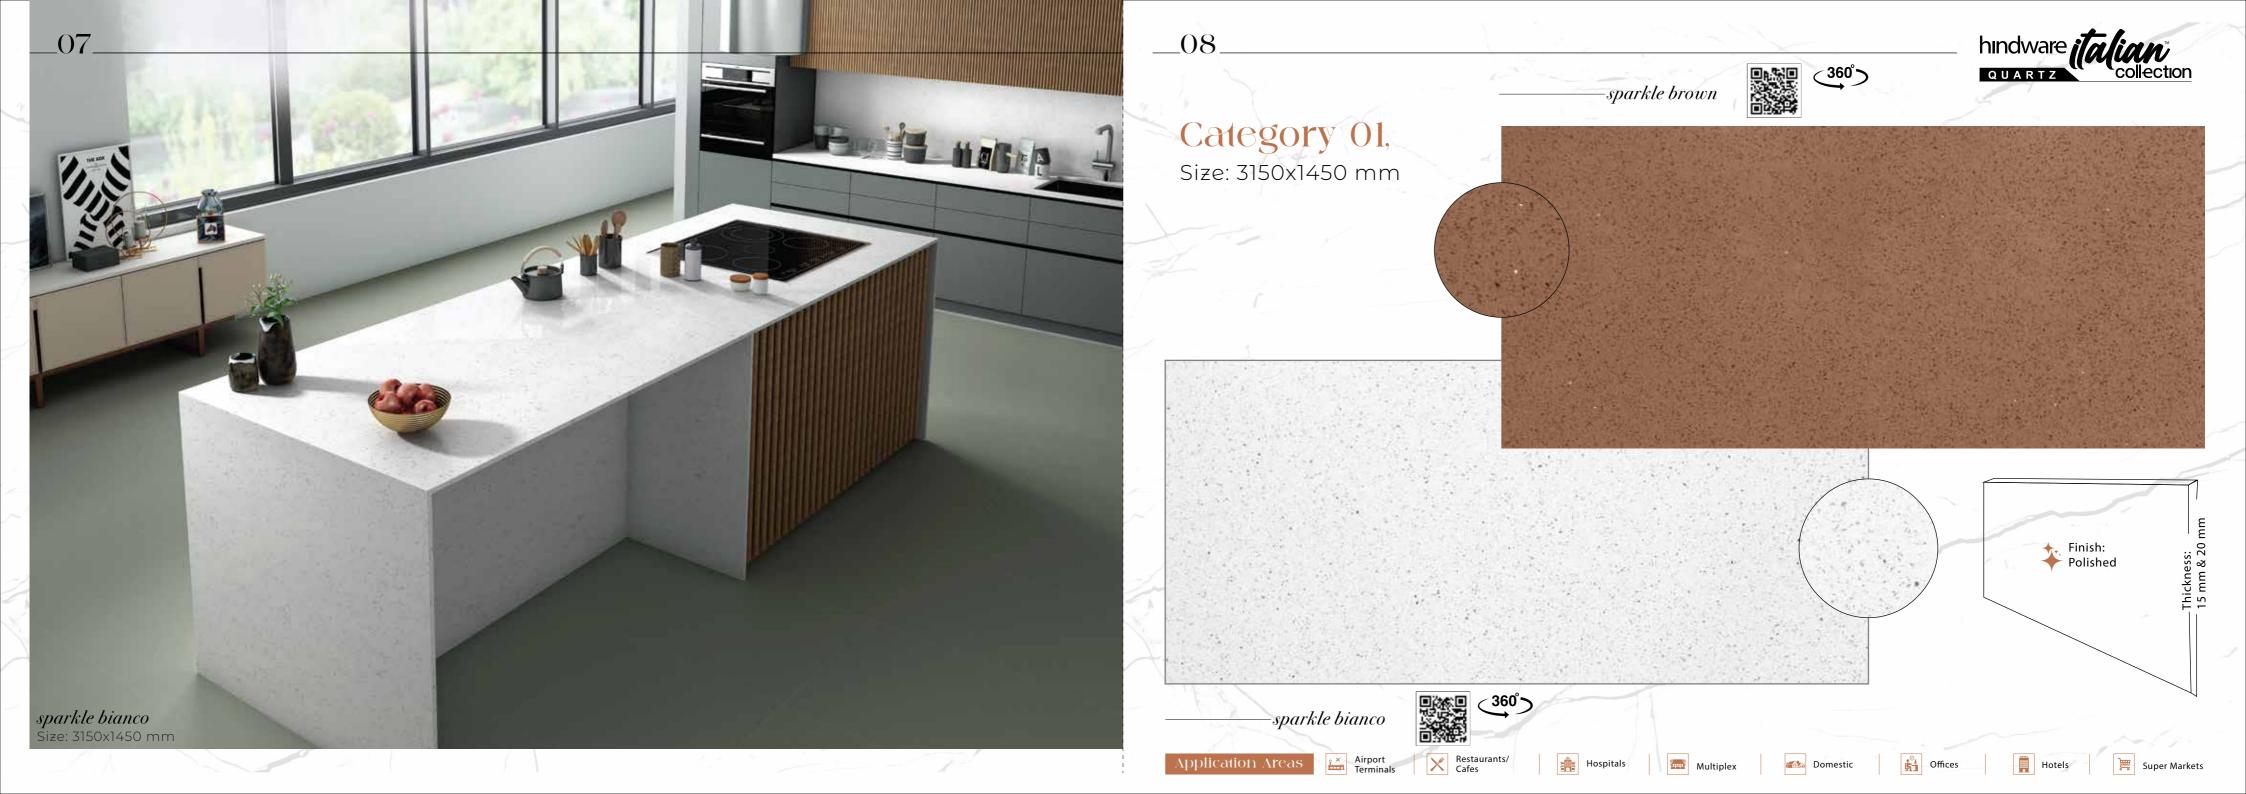



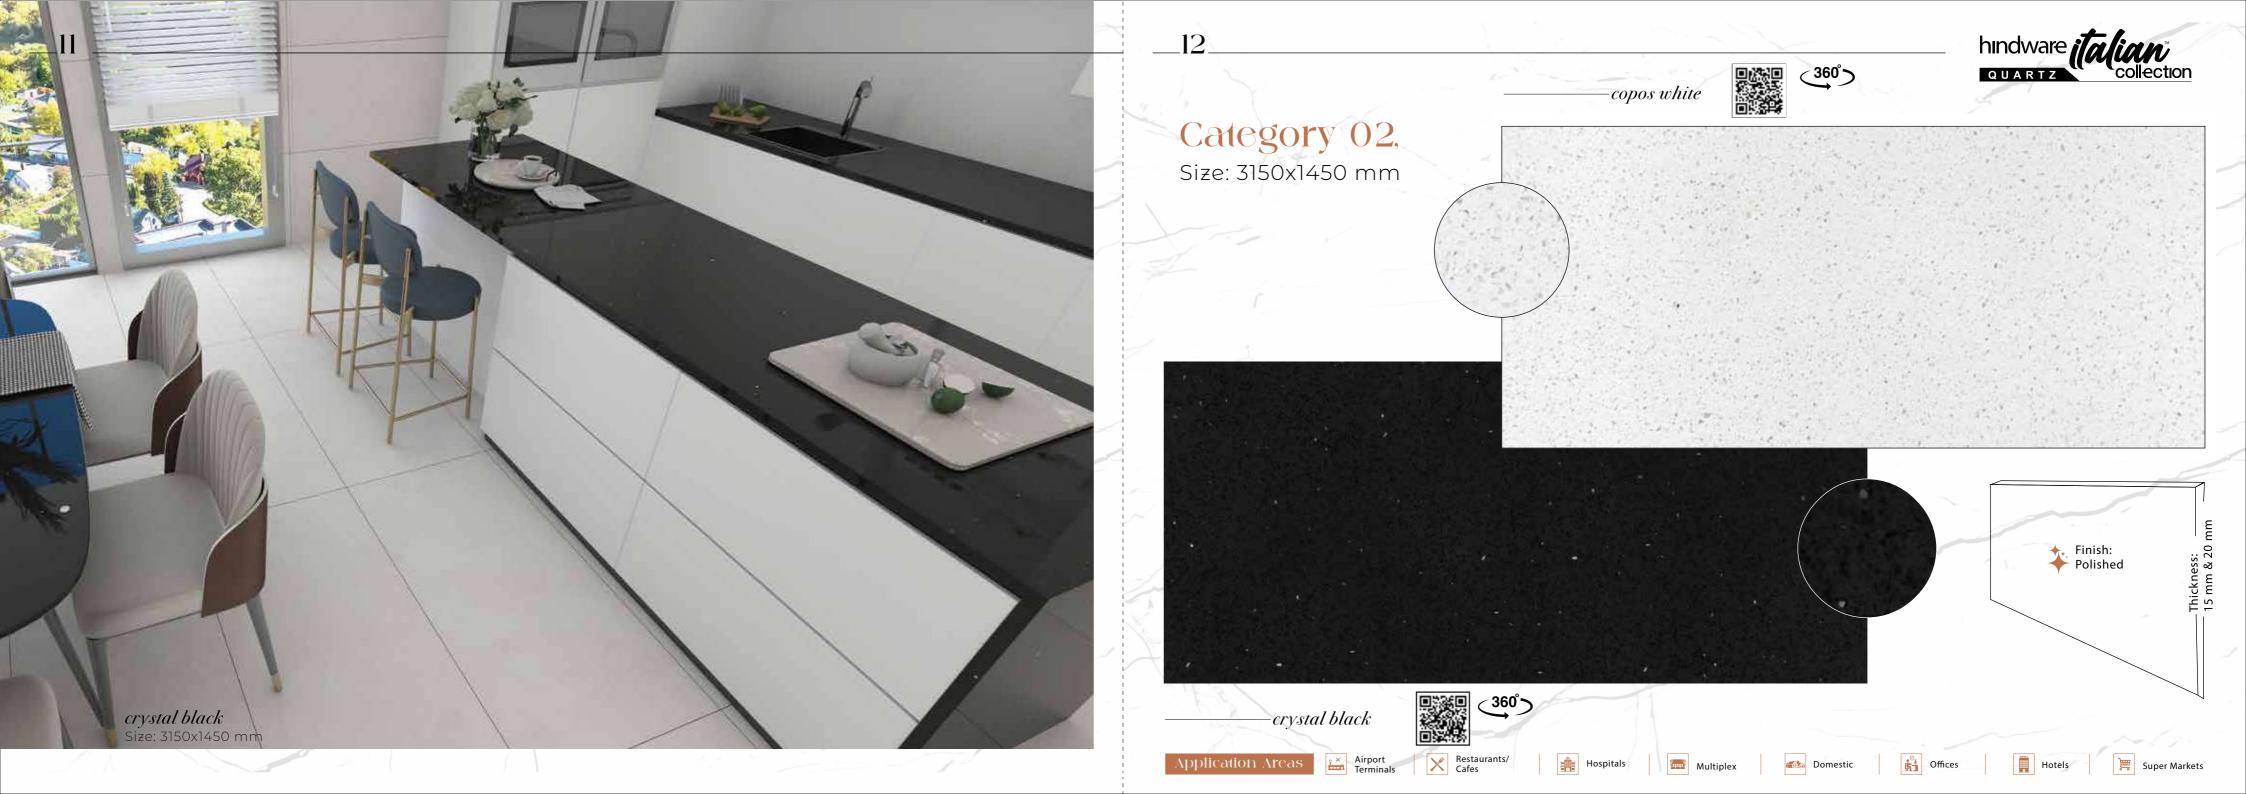

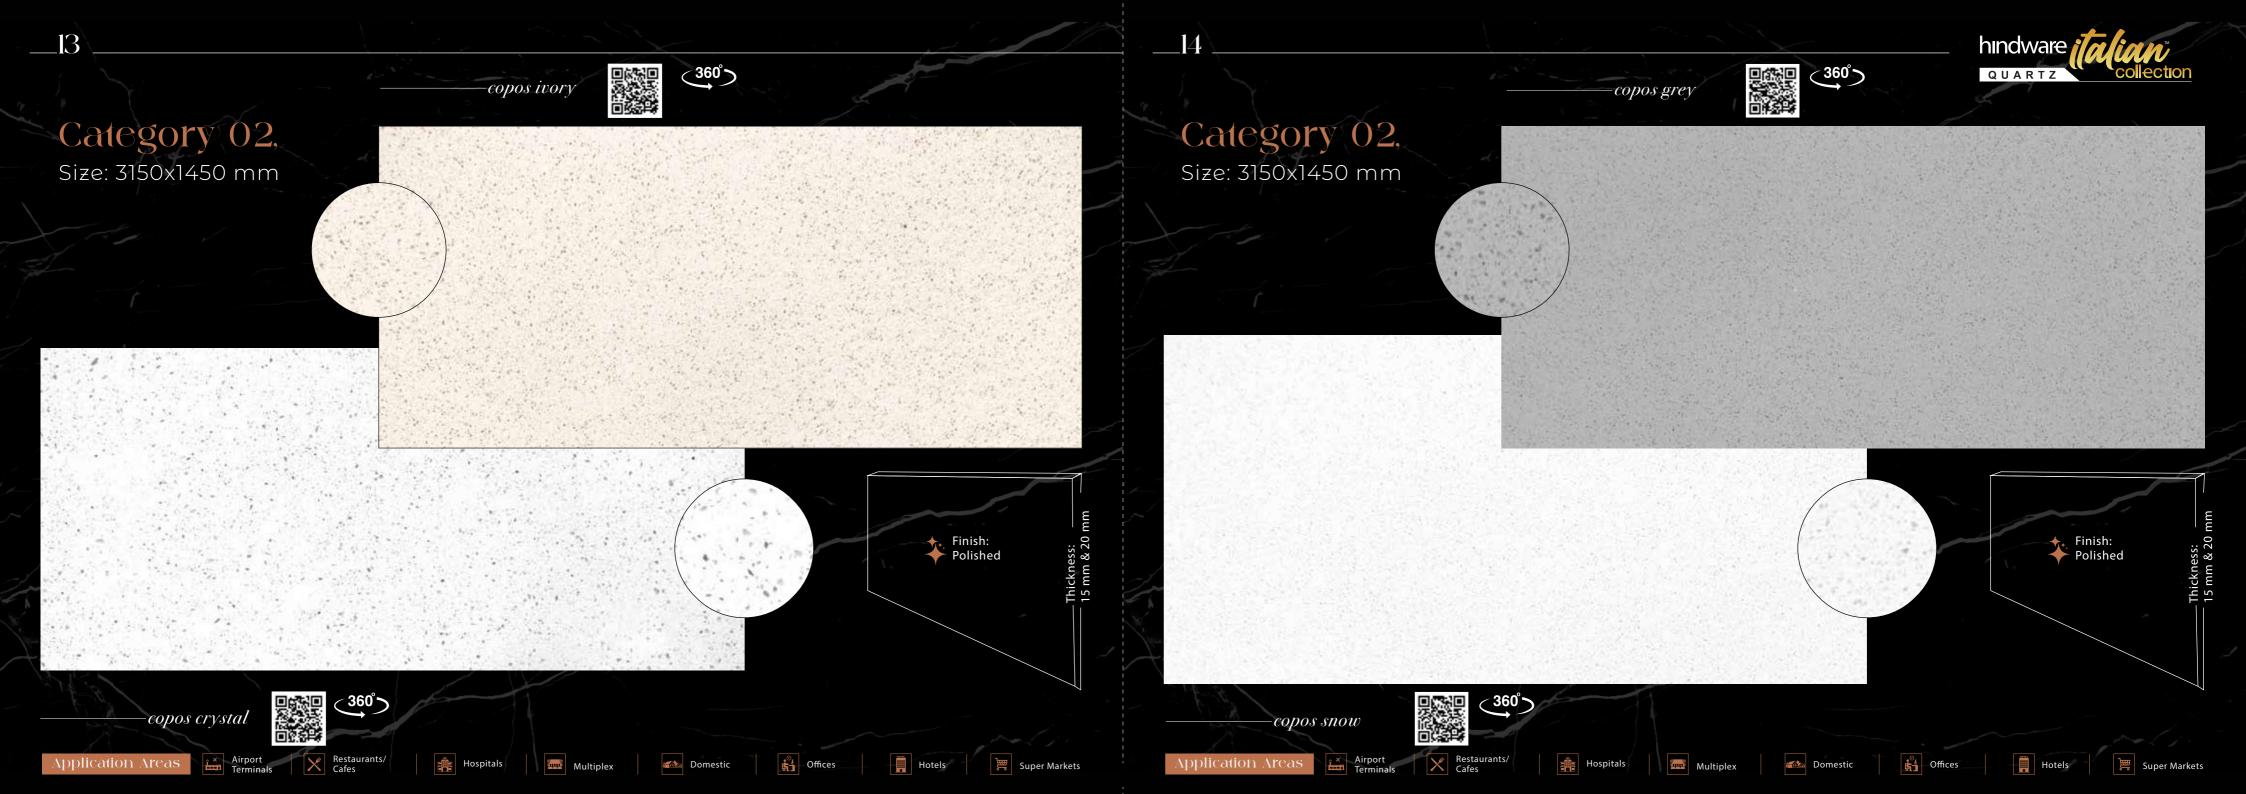














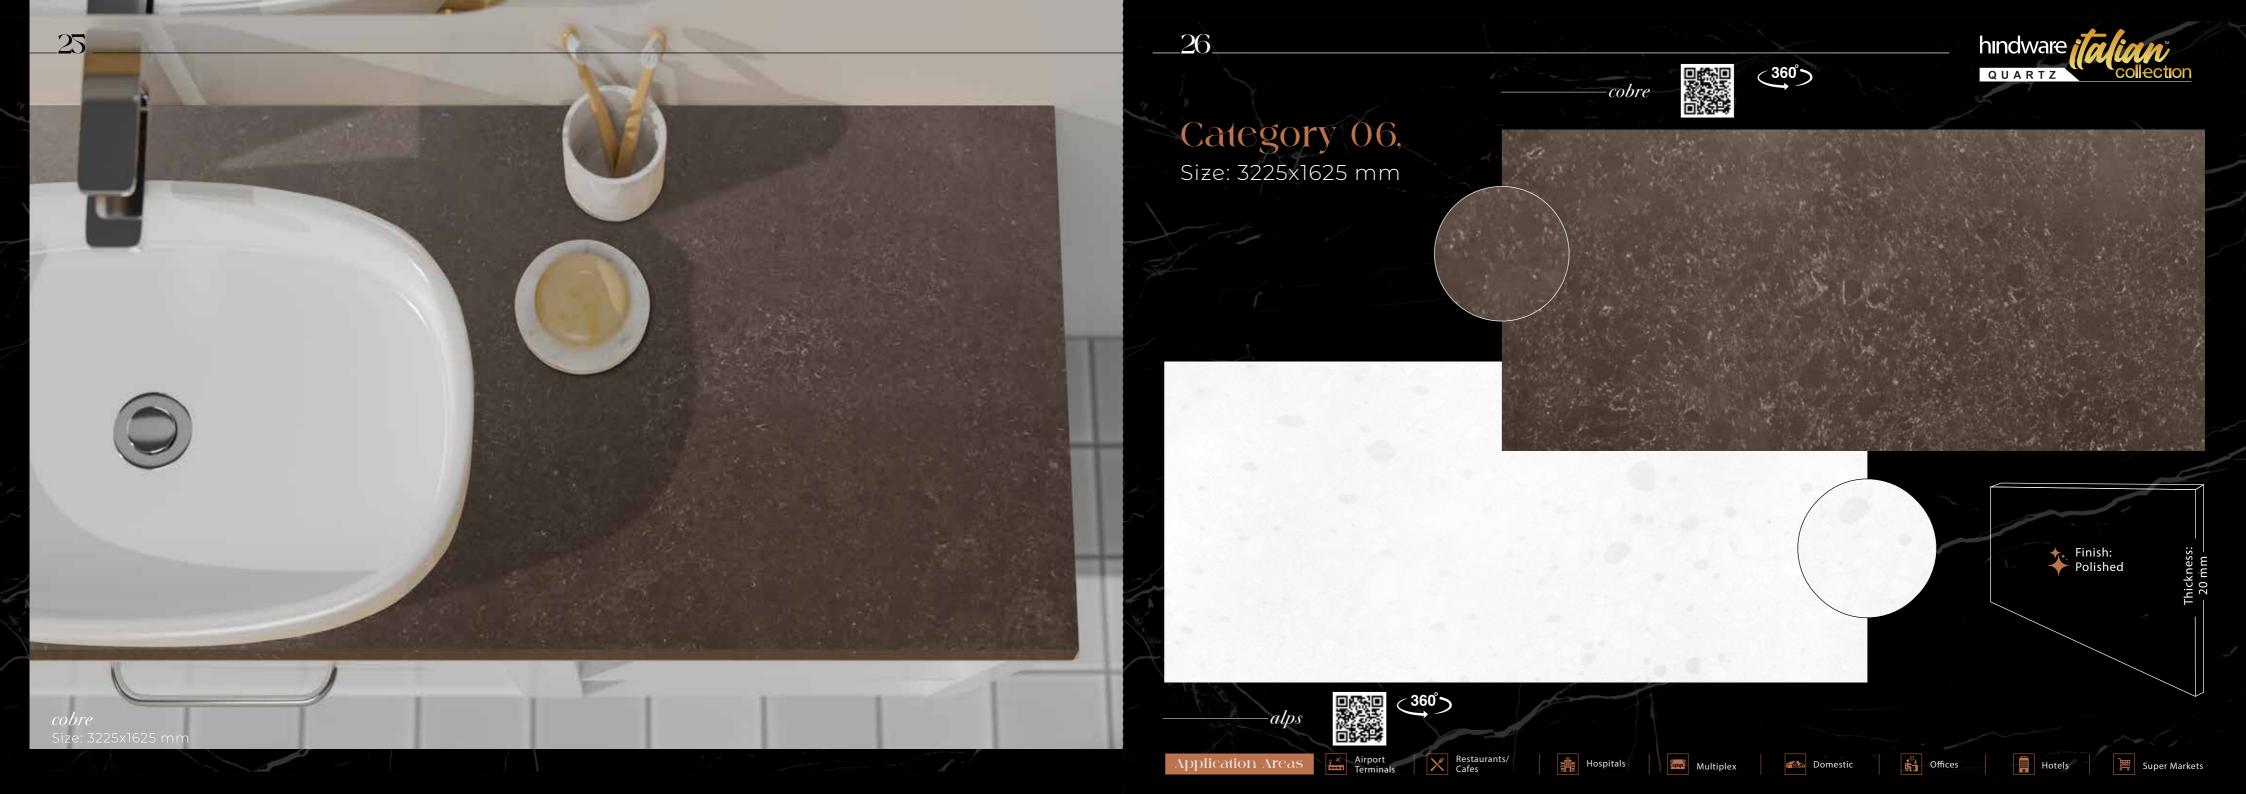

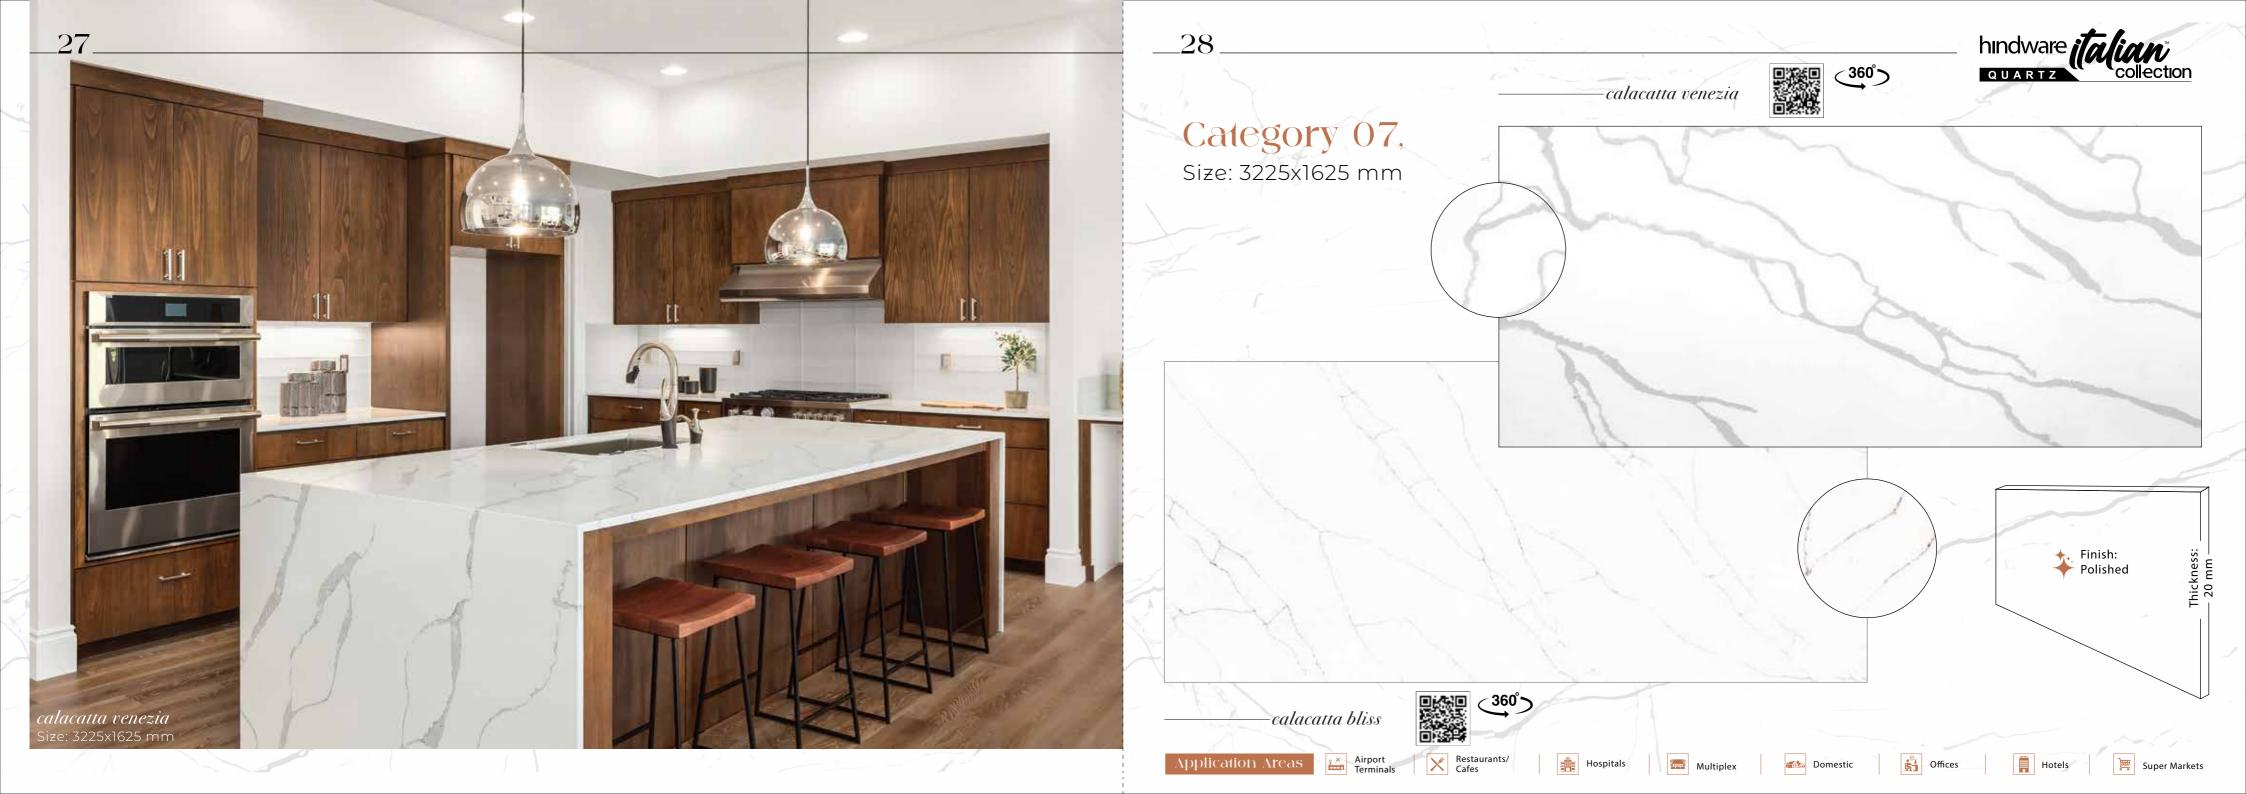


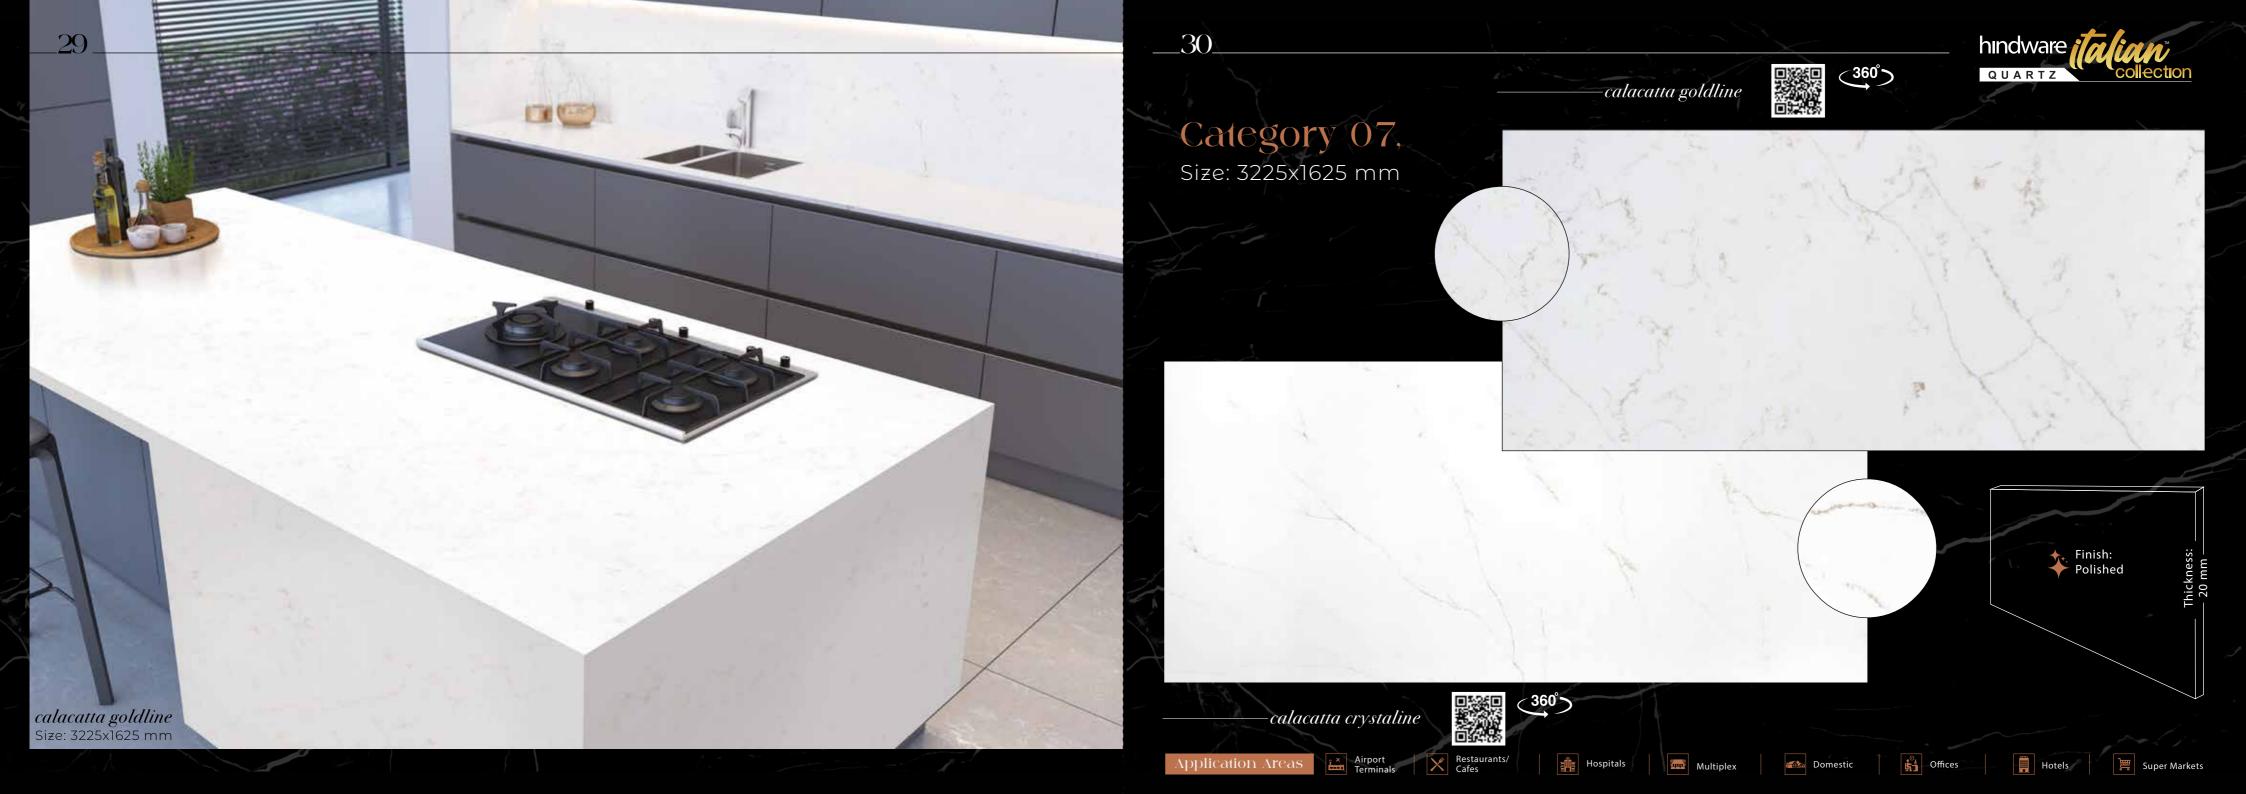

Category 07,

Size: 3225x1625 mm



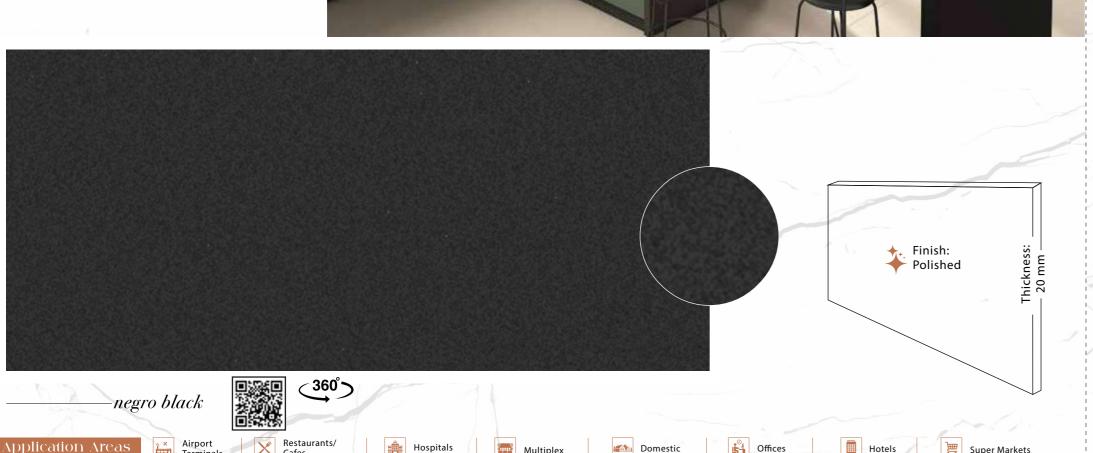





hindware interview collection

TECHINAL SPECIFICATION

Property	Results	Method ASTM C97-09	
Water Absorption	<0.05%		
MOH's Hardness	6.5-7	MOH'S Hardness Scale	
Thermal Shock	No Damage Passed 5 Cycles	ASTM C484	
Compressive Strength	24000 Psi	ASTM C170	
Flexural Strength	8500-9000 Psi	ASTM C880	
Moisture Absorption	Negligible	ASTM C97	
Abrasion Resistance	21.5 mm	ASTM C1253	
Density	2.4 g/cm ³	ASTM C373	
Cigarette Test	Unaffected	ANSI Z124.6	
Stain Resistance	Unaffected	ANSI Z124.6	
Bond Strength	205 Psi	ASTM C482	
Wear Resistance	Unaffected	ANSI Z124.6	
Thermal Expansion	2.5 X 10 ⁻⁵ in/f	ASTM C531	
Chemical Resistance	Unaffected	ASTM C650	
De-Icing Resistance	Unaffected	ASTM C672	
Freeze-Thaw Resistance	No Damage, Passed 15 Cycles	ASTM C1026	
Surface Burning Characteristics	17 (Class A/1 Rating)	ASTM E84	

PACKING DETAILS					
DIMENSION (MM)	вох				
DIMENSION (MM) Tiles/Box	Tiles/Box	Coverage/Box(SqFt.)	Coverage/Box(Sq-Mtrs.)	Thickness	Approx Box Weight In Kg.
3150x1450 mm 1 49.16	/,O 1,6	4.57	15 mm	165	
	4.07	20 mm	220		
3225x 1625 mm	1	56.41	5.24	20 mm	255

Mould Finishing









Full Bullnose

Demi Bullnose

1/2" Bevel

1/2" Bullnose

1/2" Bevel T&B



1/2" Round T&B







Full Bullnose with Acrylic Lining

Spill Free Edging

